




Outline Drawing

客户确认签名
Customer approved

日期
Date




VER	REVISION RECORD	Date	Name
A	NEW RELEASE	2015/11/04	CGP
B			
C			

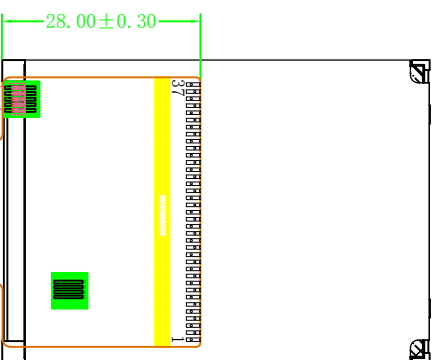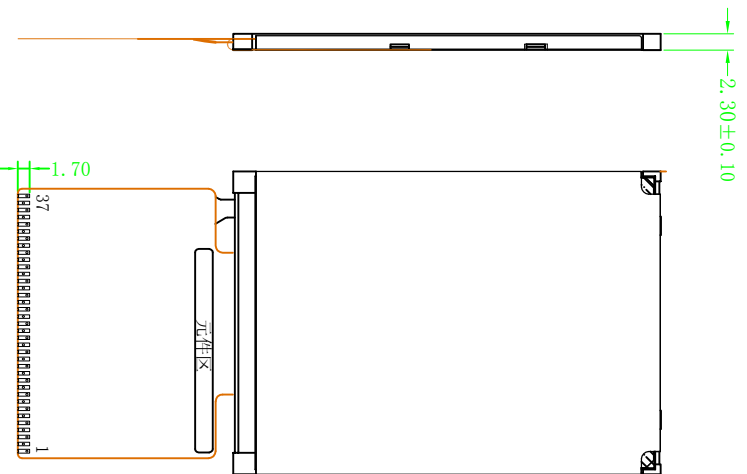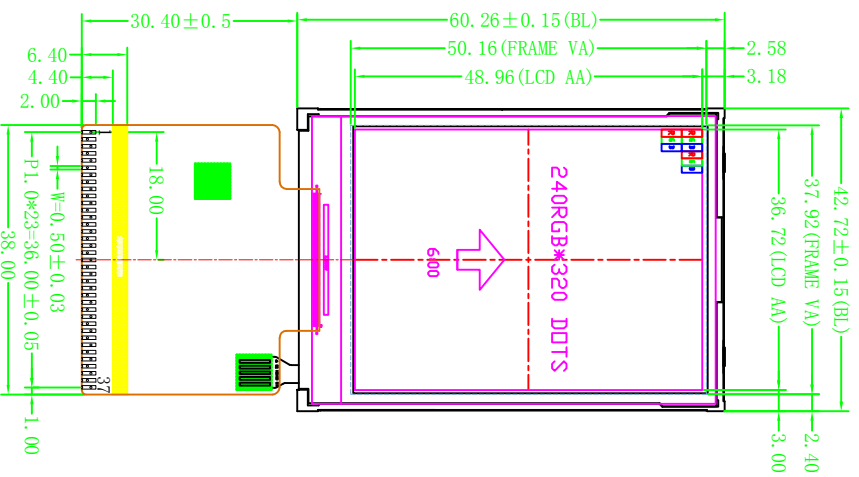

NOTE

1. Lcd Display Type: 2.4'TFT, 240*320, TN
2. Polarizer Mode: Transmissive, normally white
3. Viewing Direction: 12' CLOCK
4. Logic Supply Voltage: 3.0V
5. Control IC: ST7789V
6. Backlight: White(4*Led), Led=80Ma, Vled=3.0V
7. Backlight brightness and uniformity: 300cd/m2, >=80%
8. Operating Temp: -20 TO 70°C
9. Storage Temp: -30 TO 80°C
10. Connector: FPC
11. Ulteriorly Tolerance: ±0.2MM

BACK LIGHT CIRCUIT : 1F-80MA V1F-3.2V



NO	SYMRI
1	DB0
2	DB1
3	DB2
4	DB3
5	GND
6	ID/VCC
7	/CS
8	RS
9	/WR
10	/RD
11	NC
12	X+
13	Y+
14	X-
15	Y-
16	LEDA
17	LEDK1
18	LEDK2
19	LEDK3
20	LEDK4
21	NC
22	DB4
23	DB8
24	DB9
25	DB10
26	DB11
27	DB12
28	DB13
29	DB14
30	DB15
31	/RESET
32	VCI
33	VCI
34	GND
35	DB5
36	DB6
37	DB7

深圳市集目显示技术有限公司

Shenzhen Eagle Vision Display Technology Co., Ltd



LCM TYPE
2.4" TFT

Dwg: CUSTOMER
Material No.

Check: MODULE
SCALE: 1:1

Visual Angle
SHEET 1 OF 1