


Outline Drawing

客户确认签名  
Customer approved

日期  
Date



VER	REVISION RECORD	Date	Name
A	NEW RELEASE	2019/12/02	LIU
B			
C			

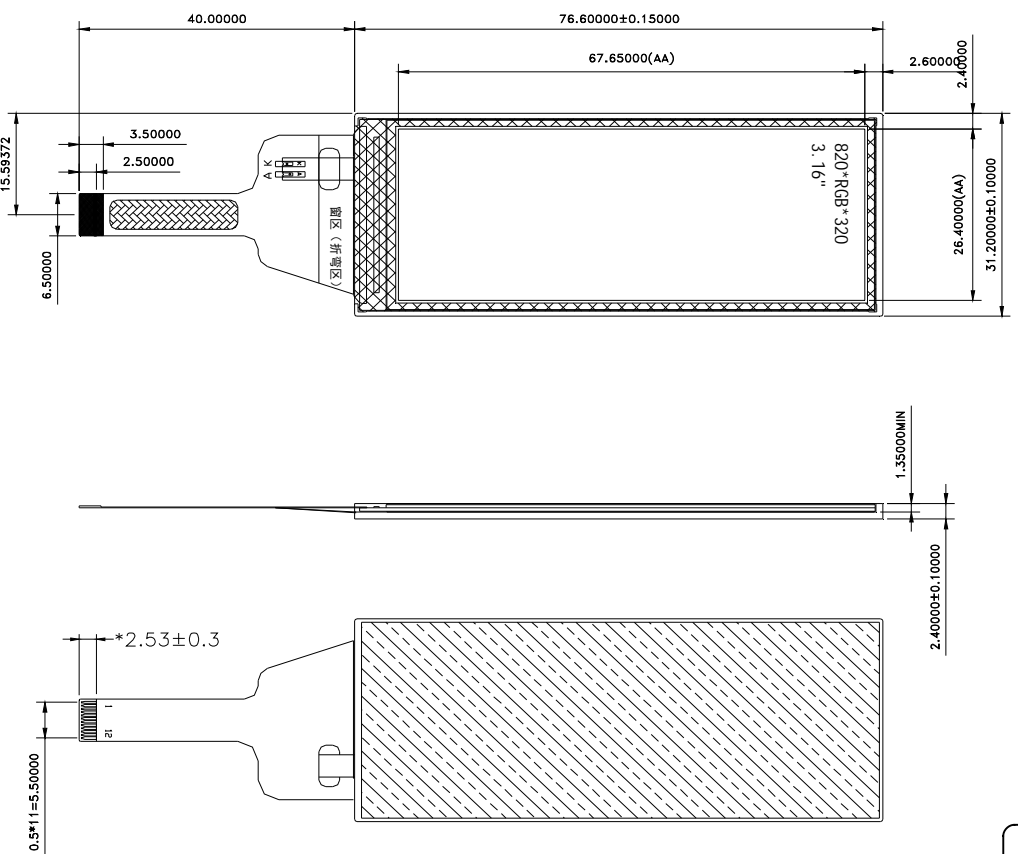

1	MI PI DIN
2	MI PI DTP
3	GND
4	MI PI CN
5	MI PI CP
6	GND
7	VDD 3.3V
8	I VO 1.8V
9	RESET
10	GND
11	LED-K
12	LED-A

NOTE

- 1.Lcd Display Type: 3.16TFT,820\*320,IPS(BOE)
- 2.Polarzier Mode:Transmissive,normally black
- 3.Viewing Direction: ALL
- 4.Logic Supply Voltage: 3.0V
- 5.Control IC: ST7701S
- 6.Backlight: White(4\*Led),ILED=20Ma,Vled=13.0V
- 7.Backlight brightness and uniformity: 500cd/m2,>=80%
- 8.Operating Temp:-20 TO 70℃
- 9.Storage Temp: -30 TO 80℃
- 10.Connector: FPC
- 11.Ultiorly Tolerance:±0.2MM

A—K  
B—E  
F—H  
LED Circuit Drawing

深圳市集目显示技术有限公司  
Shenzhen Eagle Vision Display Technology Co., Ltd

Dwg:

CUSTOMER

Material No.

Check:

MODULE

SCALE: 1:1

Visual Angle

SHEET 1 OF 1