




Outline Drawing

客户确认签名
Customer approved


日期
Date



| VER | REVISION RECORD | Date | Name |
|-----|-----------------|------------|------|
| A | NEW RELEASE | 2018/05/15 | LIU |
| B | | | |
| C | | | |

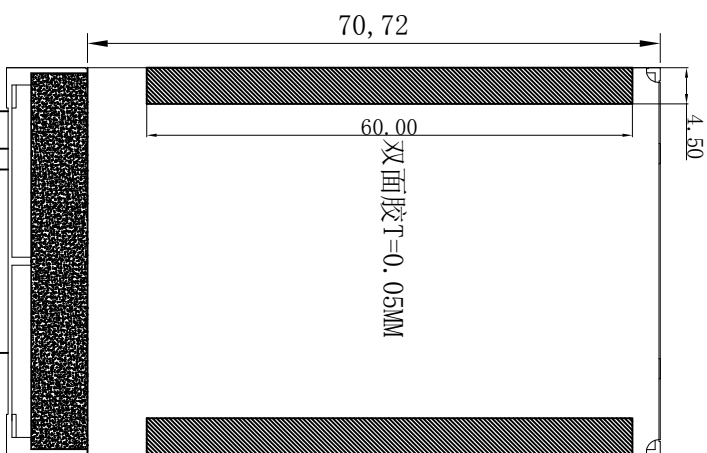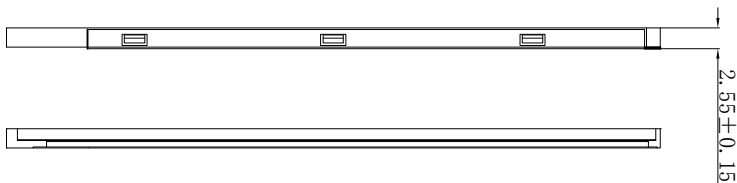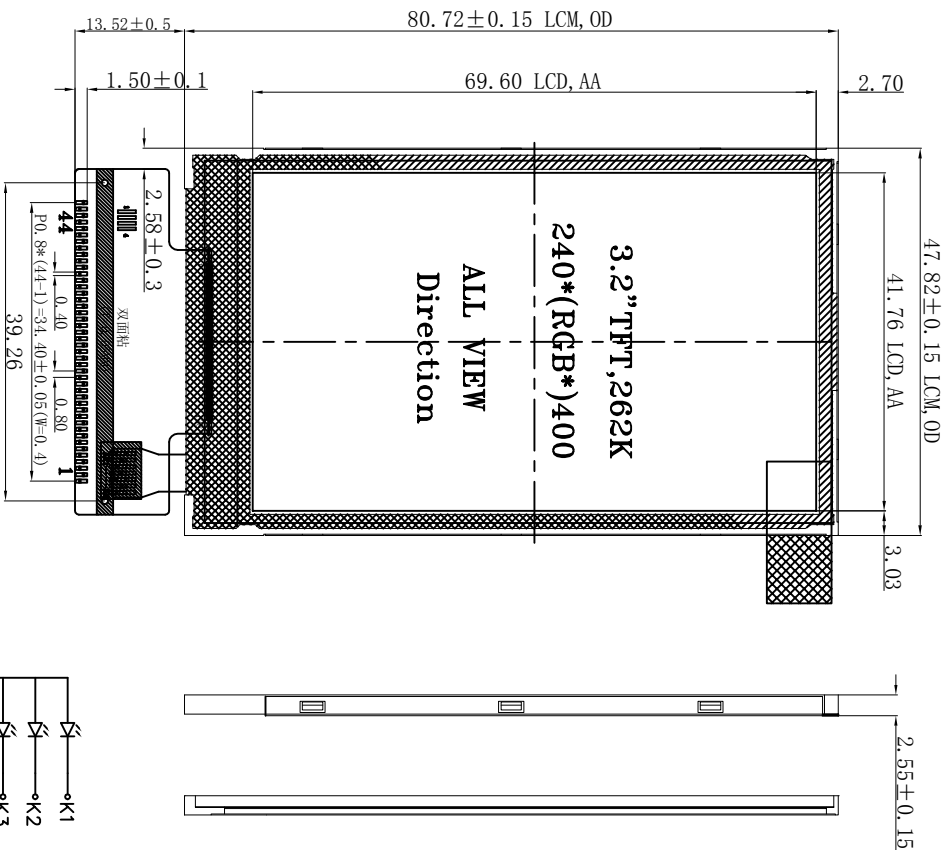

| | |
|-------|-----------|
| 1 | GND |
| 2 | NC/Y- |
| 3 | NC/X- |
| 4 | NC/Y+ |
| 5 | NC/X+ |
| 6 | GND |
| 7 | NC |
| 8 | NC |
| 9 | PMARK/NC |
| 10 | LEDPWM/NC |
| 11 | LCD_ID |
| 12 | RESET |
| 13-14 | NC |
| 15-30 | D15-D0 |
| 31 | RD |
| 32 | WR |
| 33 | RS |
| 34 | CS |
| 35 | GND |
| 36 | IOVCC |
| 37 | VCC |
| 38 | LEDK5 |
| 39 | LEDK4 |
| 40 | LEDK3 |
| 41 | LEDK2 |
| 42 | LEDK1 |
| 43 | LEDA |
| 44 | GND |



BACKLIGHT CIRCUIT DIAGRAM 120mA/LED (6LED)

- NOTE**
- 1.Lcd Display Type: 3.2TFT,240*400,IPS(BOE)
 - 2.Polarizer Mode:Transmissive,normally black
 - 3.Viewing Direction: ALL
 - 4.Logic Supply Voltage: 3.0V
 - 5.Control IC: IL19327
 - 6.Backlight: White(6*Led),ILED=120Ma, Vled=3.0V
 - 7.Backlight brightness and uniformity: 450cd/m2, >=80%
 - 8.Operating Temp:-20 TO 70°C
 - 9.Storage Temp: -30 TO 80°C
 - 10.Connector: FPC
 - 11.Ulteriorly Tolerance:±0.2MM

深圳市集目显示技术有限公司

Shenzhen Eagle Vision Display Technology Co., Ltd

LCM TYPE
3.2吋 TFT
Material No.

Dwg: CUSTOMER

Check: MODULE LMT032AIW44M01

SCALE: 1:1

Visual Angle



SHEET 1 OF 1