



Outline Drawing

客户确认签名
Customer approved


日期
Date



VER	REVISION RECORD	Date	Name
A	NEW RELEASE	2017/04/14	CGP
B			
C			

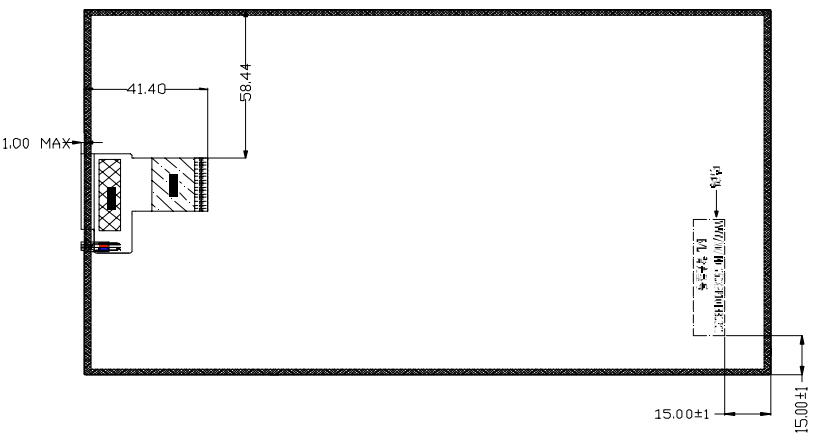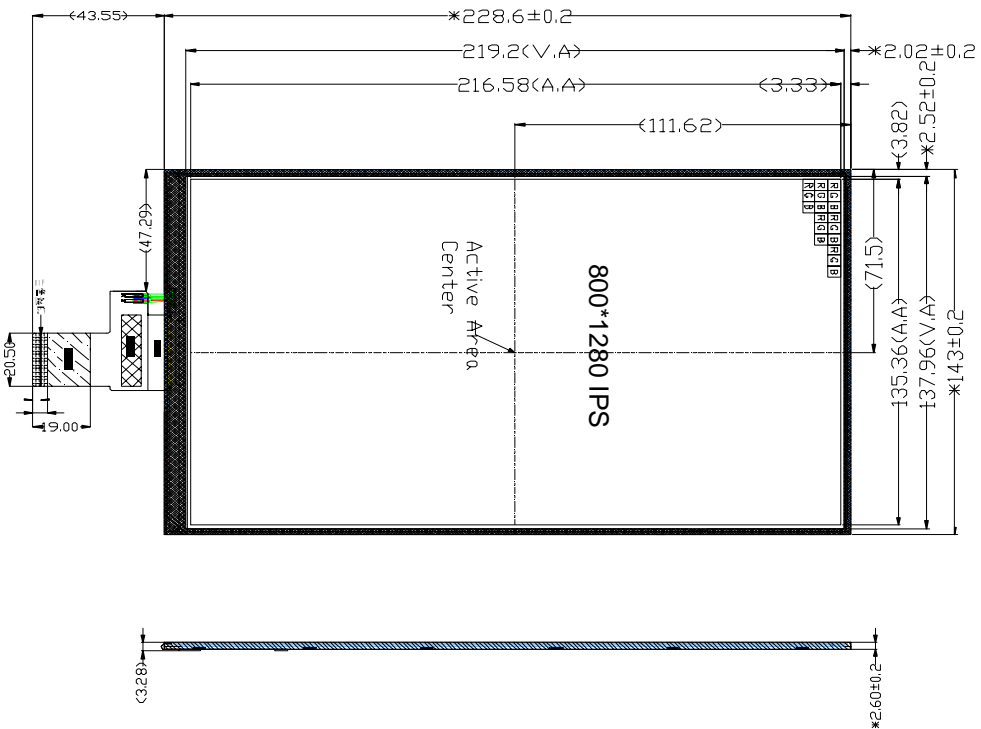

- NOTE**
1. Lcd Display Type: 10.1" TFT, 800*1280, IPS
 2. Polarizer Mode: Transmissive, normally BLACK
 3. Viewing Direction: ALL
 4. Logic Supply Voltage: 3.0V
 5. Control IC:
 6. Backlight: White(4*7 Led), ILed=80mA, Vled=21.0V
 7. Backlight brightness and uniformity: 300cd/m2, >=80%
 8. Operating Temp: -10 TO 50°C
 9. Storage Temp: -20 TO 60°C
 10. Connector: FPC
 11. Ulteriorly Tolerance: ±0.2MM



Pin	NAME
1	NC
2	VD0
3	VD0
4	VD0
5	GND
6	RESET
7	NC
8	GND
9	INO+
10	GND
11	IN1-
12	IN1+
13	GND
14	IN2-
15	IN2+
16	GND
17	CLK-
18	CLK+
19	GND
20	IN3-
21	IN3+
22	GND
23	NC
24	NC
25	GND
26	NC
27	NC
28	NC
29	NC
30	GND
31	LED-
32	LED-
33	NC
34	NC
35	NC
36	NC
37	NC
38	NC
39	LED+
40	LED+

深圳市集目显示技术有限公司

		LCM TYPE
E.V.T Shenzhen Eagle Vision Display Technology Co., Ltd		10.1吋 TFT
Dwg:	CUSTOMER	Material No.
Check:	MODULE	SCALE: 1:1
	Visual Angle	SHEET 1 OF 1

