




Outline Drawing

客户确认签名
Customer approved


日期
Date



| VER | REVISTION RECORD | Date | Name |
|-----|------------------|------------|-------|
| A | NEW RELEASE | 2017/05/22 | zhang |
| B | | | |
| C | | | |

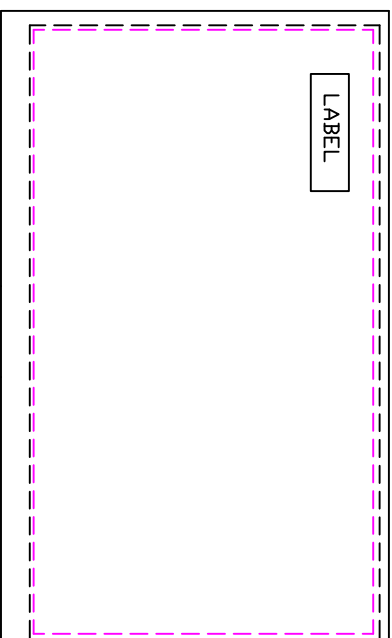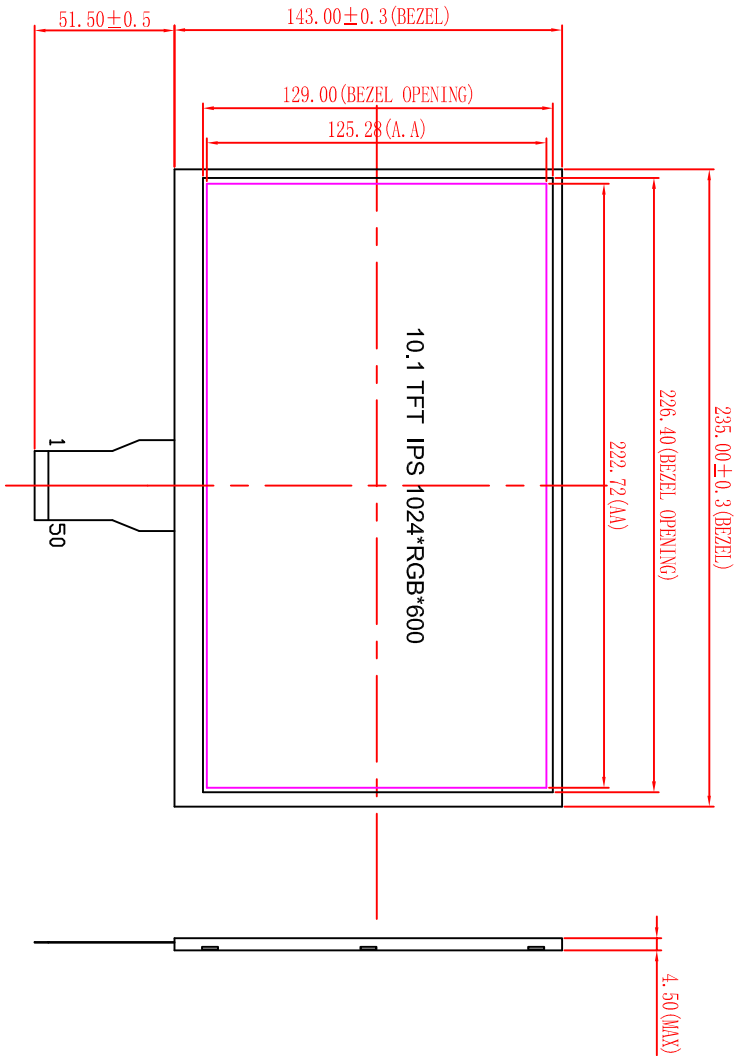


| PIN | NAME |
|-------|-------|
| 1 | VLED+ |
| 2 | VLED+ |
| 3 | VLED- |
| 4 | VLED- |
| 5 | GND |
| 6 | VCOM |
| 7 | DYDD |
| 8 | MODE |
| 9 | DE |
| 10 | VSYNC |
| 11 | HSYNC |
| 12-19 | B7-B0 |
| 20-27 | G7-G0 |
| 28-35 | R7-R0 |
| 36 | GND |
| 37 | DELK |
| 38 | GND |
| 39 | L/R |
| 40 | L/D |
| 41 | VGH |
| 42 | VGL |
| 43 | AVDD |
| 44 | RESET |
| 45 | NC |
| 46 | VCOM |
| 47 | DT1TB |
| 48 | GND |
| 49 | NC |
| 50 | NC |

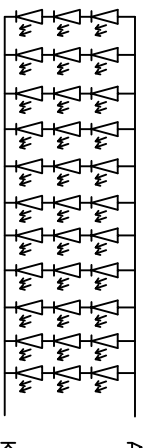

NOTE

- 1.Lcd Display Type: 10.1 TFT,1024*600,IPS,RGB
- 2.Polarizer Mode:Transmissive, normally black
- 3.Viewing Direction: ALL
- 4.Logic Supply Voltage: 3.0V
- 5.Control IC:
- 6.Backlight: White(11*3 Led),ILed=220mA,Vled=9.3V
- 7.Backlight brightness and uniformity: 370cd/m2,>=80%
- 8.Operating Temp: -10 TO 60
- 9.Storage Temp: -20 TO 70°C
- 10.Connector: FPC
- 11.Ulteriorly Tolerance:±0.2MM

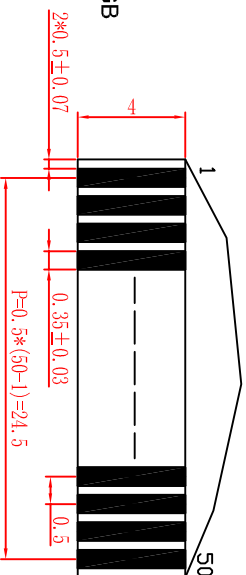

深圳市集目显示技术有限公司
Shenzhen Eagle Vision Display Technology Co., Ltd

LCM TYPE
10.1吋 TFT
Material No.

| | | | |
|--------|----------|----------------|------------|
| Dwg: | CUSTOMER | | |
| Check: | MODULE | EVT101EIN50R02 | SCALE: 1:1 |

| | | | |
|----------|--------------|--|--------------|
| Rev: 1.0 | Visual Angle | | SHEET 1 OF 1 |
|----------|--------------|--|--------------|