





Outline Drawing

客户确认签名
Customer approved



日期
Date



VER	REVISION RECORD	Date	Name
A	NEW RELEASE	2017/04/14	CGP
B			
C			

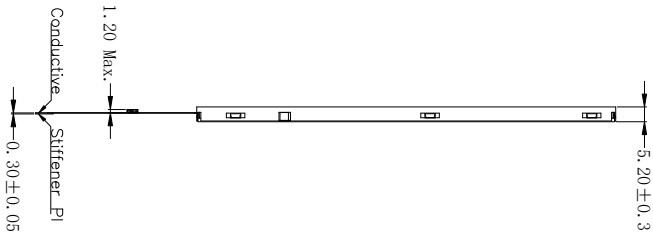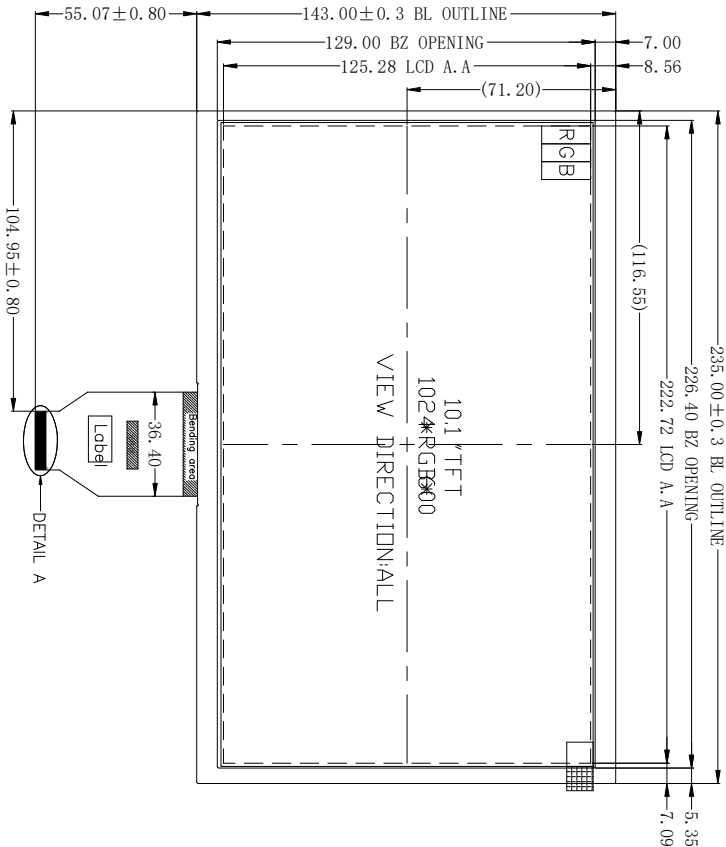

PIN	FUNCTION
1	VCOM
2	VDD
3	VDD
4	NC
5	RESET
6	STBYB
7	GND
8	RXIND-
9	RXIND+
10	GND
11	RXIN1-
12	RXIN1+
13	GND
14	RXIN2-
15	RXIN2+
16	GND
17	RXCLKIN-
18	RXCLKIN+
19	GND
20	RXIN3-
21	RXIN3+
22	GND
23	NC
24	NC
25	GND
26	NC
27	NC(CDMD)
28	SEL BK(SD)
29	AVDD
30	GND
31	LED-
32	LED-
33	L/R
34	U/D
35	VGL
36	NC
37	NC
38	VGH
39	LED+
40	LED+



NOTE

- 1.Lcd Display Type: 10.1" TFT, 1024*600,IPS
- 2.Polarzier Mode: Transmissive, normally BLACK
- 3.Viewing Direction: ALL
- 4.Logic Supply Voltage: 3.0V
- 5.Control IC: HX8282-A11 Gate: HX8696-A
- 6.Backlight: White(13*3 LED), Iled=260mA, Vled=9.6V
- 7.Backlight brightness and uniformity: 500cd/m2, >=80%
- 8.Operating Temp: -20 TO 70 °C
- 9.Storage Temp: -30 TO 80 °C
- 10.Connector: FPC
- 11.Ultiority Tolerance: ±0.2MM

深圳市集目显示技术有限公司
Shenzhen Eagle Vision Display Technology Co., Ltd

E.V.T

LCM TYPE
10.1" TFT

Material No.

Dwg:		CUSTOMER			
Check:		MODULE	LMT101EIW40L01		SCALE: 1:1
		Visual Angle			SHEET 1 OF 1