




# Outline Drawing

客户确认签名  
Customer approved

日期  
Date




VER	REVISION RECORD	Date	Name
A	NEW RELEASE	2020/06/06	L1
B			
C			

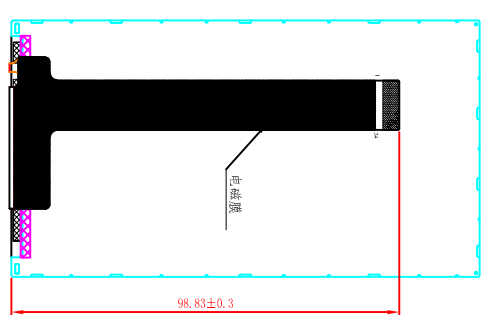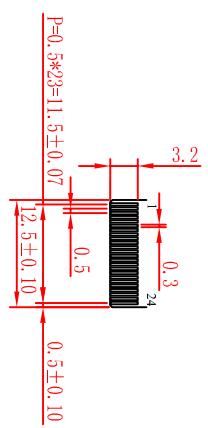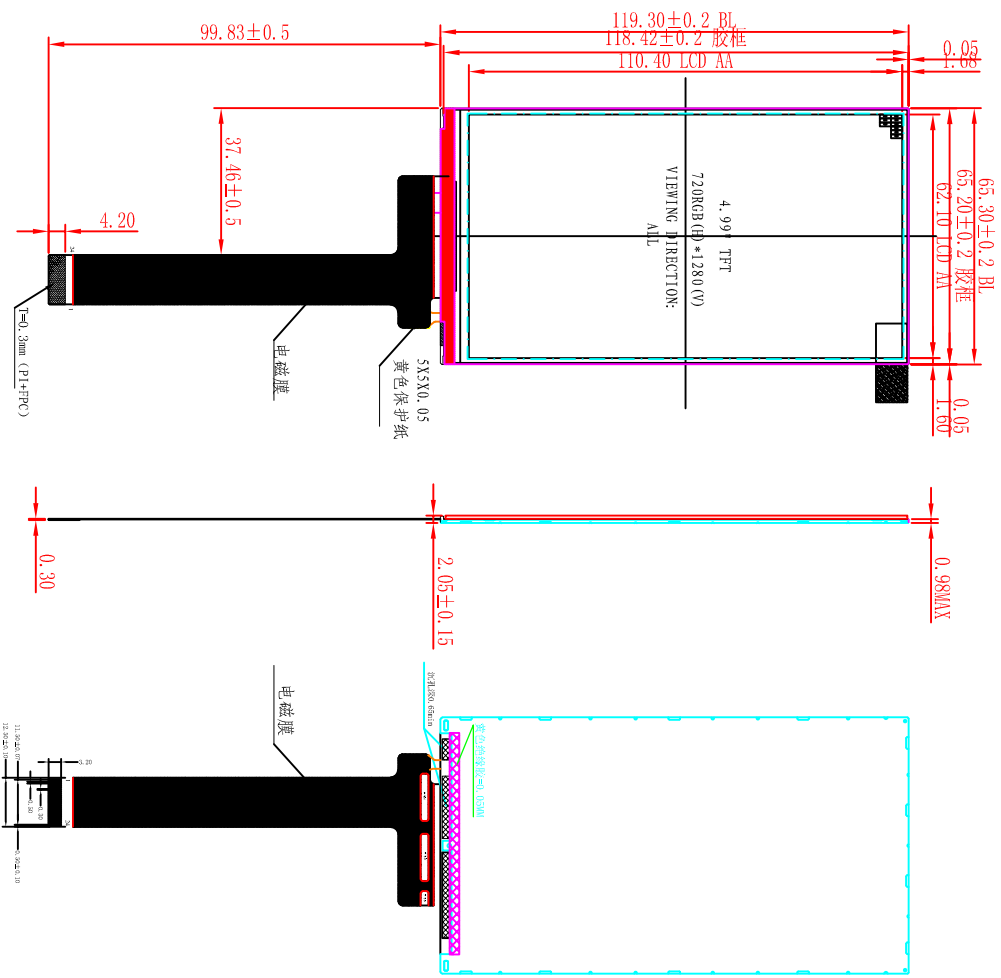

FPC弯折后示意图  
FPC弯折出货

Pin	Pin Define
1	GND
2	DON
3	DOP
4	GND
5	D1N
6	D1P
7	GND
8	CLKN
9	CLKP
10	GND
11	D3P
12	D3N
13	GND
14	D2P
15	D2N
16	GND
17	RESET
18	FMARK
19	IOVCC
20	VCC 3.3V
21	VCC 3.3V
22	LCDID
23	BLEDD-
24	BLEDD+

If=2\*20mA, V=19.2V



## NOTE

- 1.Lcd Display Type: 5.0" TFT, 720\*1280, JPS, MIPI
- 2.Polarizer Mode: Transmissive, normally black
- 3.Viewing Direction: ALL
- 4.Logic Supply Voltage: 3.0V
- 5.Control IC: IL19881D
- 6.Backlight: White(2\*6 Led), Iled=40mA, Vled=19.2V
- 7.Backlight brightness and uniformity: 300cd/m2, >=80%
- 8.Operating Temp: -20 TO 70
- 9.Storage Temp: -30 TO 80℃
- 10.Connector: FPC
- 11.Utteriorly Tolerance: ±0.2MM



深圳市集目显示技术有限公司  
Shenzhen Eagle Vision Display Technology Co., Ltd

LCM TYPE  
5吋 TFT  
Material No.

Dwg:	CUSTOMER		
Check:	MODULE	EVT050FIW24MP01	SCALE: 1:1
Dim:	MM	Visual Angle	SHEET 1 OF 1