



Outline Drawing

客户确认签名
Customer approved

日期
Date



VER	REVISION RECORD	Date	Name
A	NEW RELEASE	2019/03/02	ANDY
B			
C			

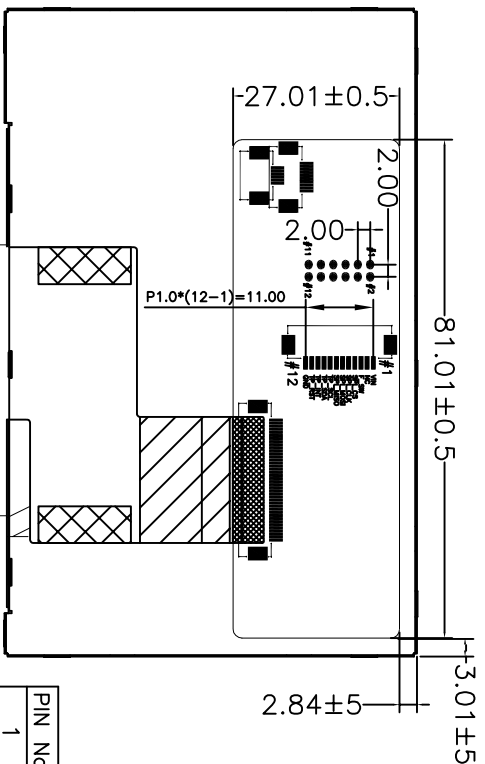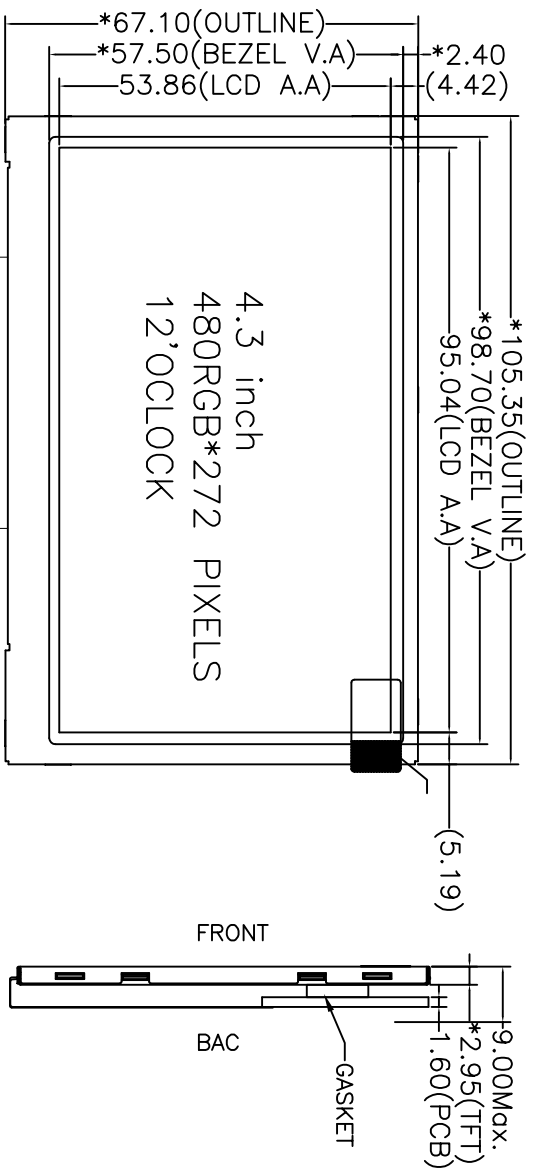

PIN No.	SYMBOL
1	VIN
2	NC
3	FLASH_SW
4	SPI_CS
5	SPI_CLK
6	SPI_MOSI
7	SPI_MISO
8	TP_SCL/NC
9	TP_SDA/NC
10	TP_INT/NC
11	TP_RST/NC
12	GND

NOTE

1. Lcd Display Type: 4.3' TFT, 480*272
2. Polarizer Mode: Transmissive, normally white
3. Viewing Direction: 12O'CLOCK
4. Logic Supply Voltage: 3.3V OR 5.0V
5. Control IC: NP4185+8MFLASH
6. Backlight: White
7. Backlight brightness and uniformity: 250cd/m2, >=80%
8. Operating Temp: -20 TO 70°C
9. Storage Temp: -30 TO 80°C
10. Connector:
11. Ulteriorly Tolerance: ±0.2MM

NO TP: LMT043S12NT01
CTP: LMT043S12CT01
RTP: LMT043S12RT01



深圳市集目显示技术有限公司

Shenzhen Eagle Vision Display Technology Co., Ltd

LCM TYPE

4.3吋 TFT

Material No.

Dwg: CUSTOMER

Check: MODULE

LMT043S12NT01

SCALE: 1:1

Visual Angle



SHEET 1 OF 1