


Outline Drawing

客户确认签名
Customer approved


日期
Date




VER	REVISION RECORD	Date	Name
A	NEW RELEASE	2020/10/18	zxp
B			
C			

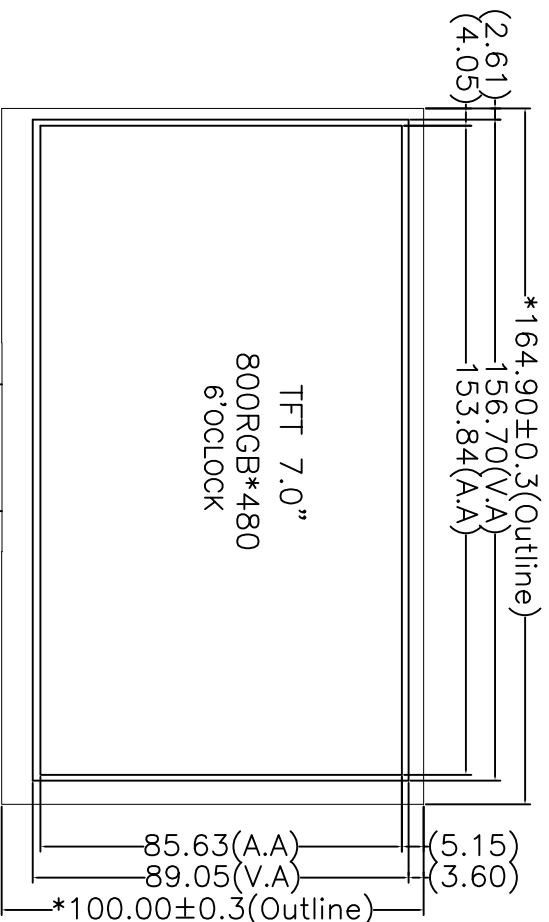

FRONT

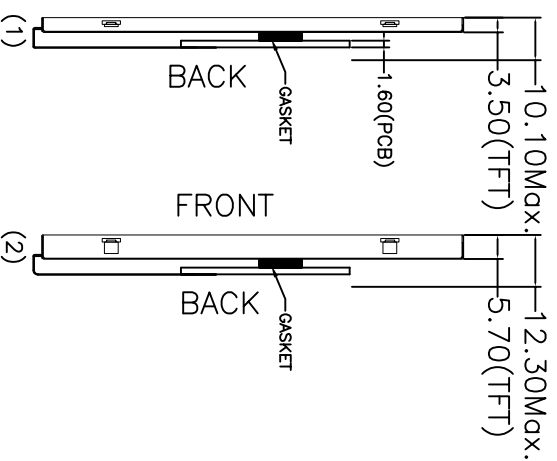

PIN No.	SYMBOL
1	VIN
2	NC
3	FLASH_SW
4	SPI_CS
5	SPI_CLK
6	SPI_MOSI
7	SPI_MISO
8	TP_SCL/NC
9	TP_SDA/NC
10	TP_INT/NC
11	TP_RST/NC
12	GND

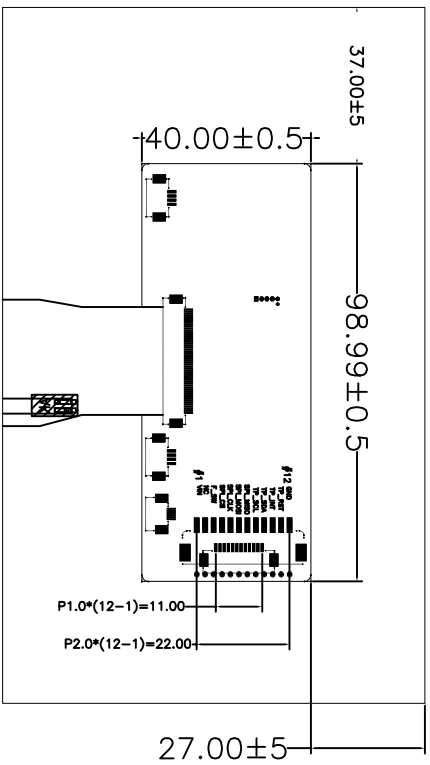

NOTE

- 1.Lcd Display Type: 7.0' TFT,800*480
- 2.Polarzier Mode:Transmissive, normally white
- 3.Viewing Direction: 60'CLOCK
- 4.Logic Supply Voltage: 3.3V OR 5.0V
- 5.Control IC: NP4185+16M FLASH
- 6.Backlight: White
- 7.Backlight brightness and uniformity: 280cd/m2, >=80%
- 8.Operating Temp: -20 TO 70°C
- 9.Storage Temp: -30 TO 80°C
- 10.Connector:
- 11.Ulteriorly Tolerance:±0.2MM

NO TP: LMT070S12NT01
CTP: LMT070S12CT01
RTP: LMT070S12RT01

		深圳市集目显示技术有限公司 Shenzhen Eagle Vision Display Technology Co., Ltd		LCM TYPE	7吋串口TFT
Dwg:	CUSTOMER	MODULE	LMT070S12NT01	Material No.	
Check:	MODULE	Visual Angle		SCALE: 1:1	
				SHEET 1 OF 1	

电子产品制作