


Outline Drawing

客户确认签名
Customer approved

日期
Date

VER	REVISION RECORD	Date	Name
A	NEW RELEASE	2007/12/15	YXO
B			
C			

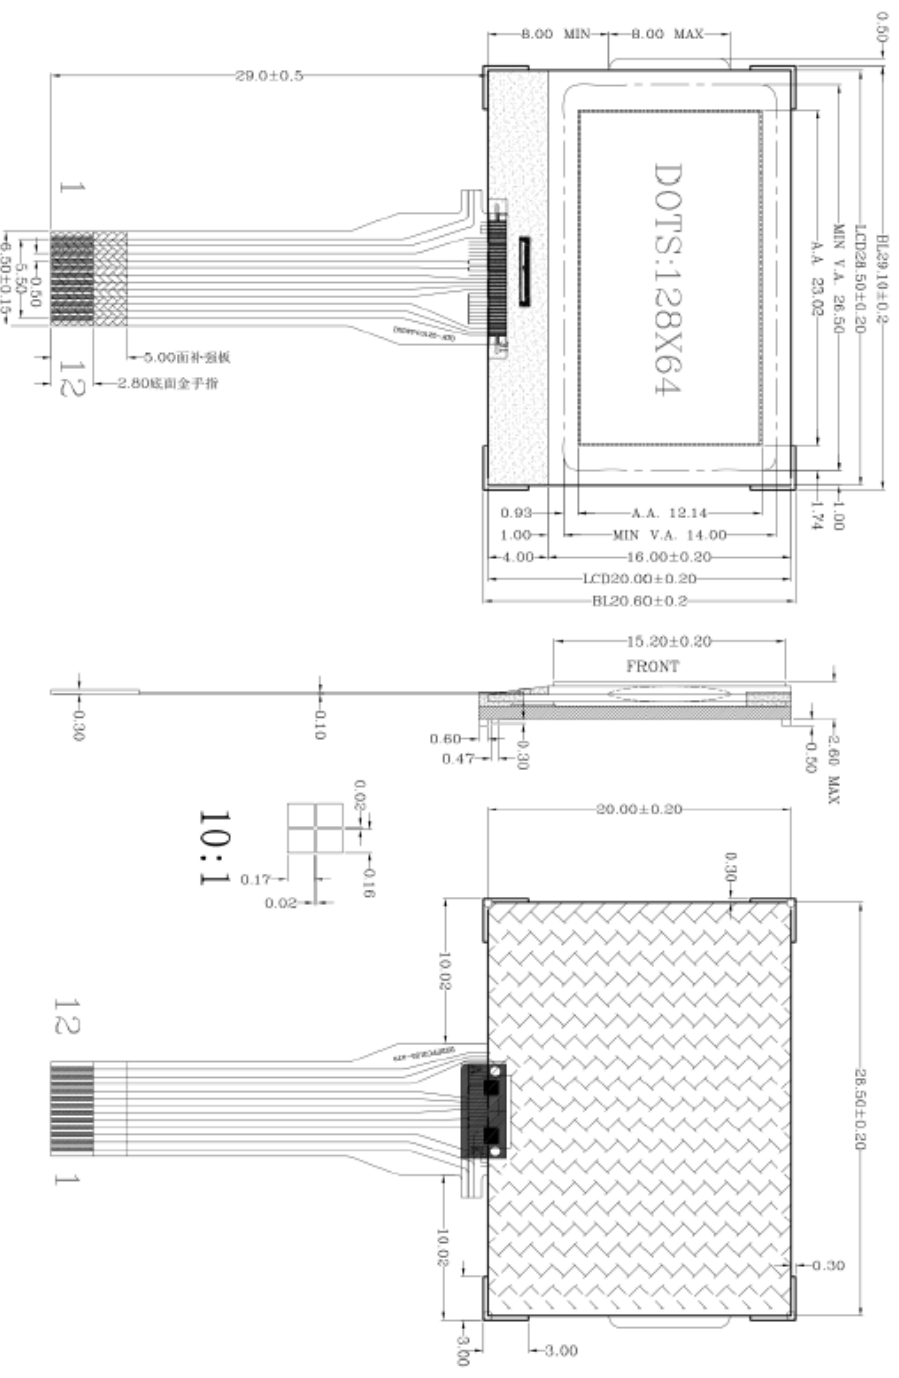

PIN	ASSIGN
1	LED K
2	LED A
3	W/G
4	XV0
5	V0
6	VSS
7	VDD
8	SDA
9	SCL
10	A0
11	REST
12	CS

NOTE

- 1.Lcd Display Type: DFSTN
- 2.Polarizer Mode: Transmissive, negative
3. Viewing Direction: 6:00
4. Drive Method: 1/9Bias, 1/65Duty
5. Logic Supply Voltage: 3.3V
6. LCD Driving Voltage: 8.8V
7. Operating Temp: 0 TO 50°C
8. Storage Temp: -10 TO 60°C
9. Control IC: ST7567(COG)
10. Backlight: White(1*Led), ILed=15mA, Vled=3.0V
11. Connector: fpc
12. Utteriorly Tolerance: ±0.2MM



E.V.T

深圳市集目显示技术有限公司
Shenzhen Eagle Vision Display Technology Co., Ltd

LCM TYPE

128*64 DOTS

Material No.

Dwg:

CUSTOMER


Check:

MODULE

LMG12864018DNWM-A

SCALE: 1:1

Visual Angle



SHEET 1 OF 1