



# Outline Drawing

客户确认签名  
Customer approved

日期  
Date

VER	REVISION RECORD	Date	Name
A	NEW RELEASE	2006/06/16	YOYO
B	改用CI7066-01	2011/03/22	CGP
C	LCD改成VA模式	2017/06/03	LXH

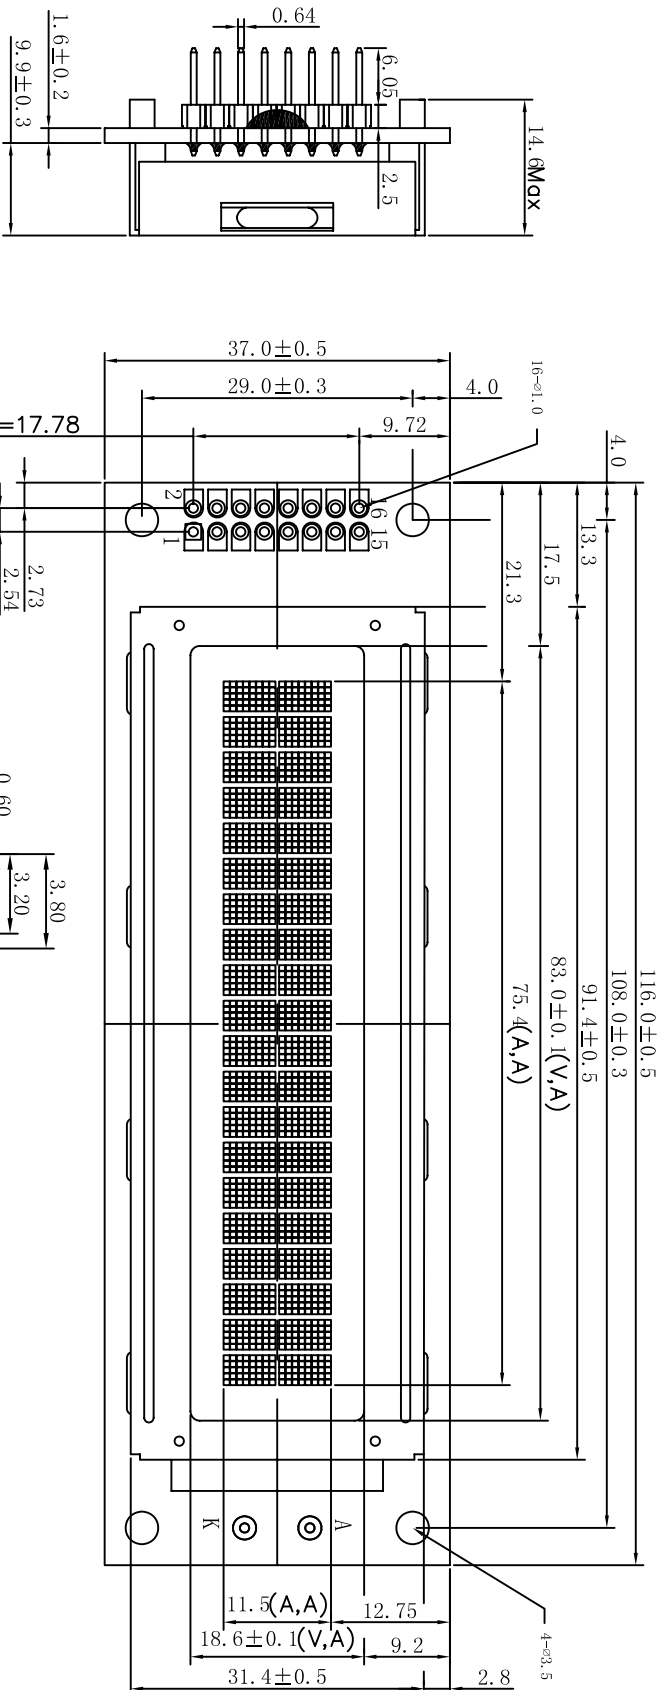

PIN NO.	1	2	3	4	5	6	7	8
SYMBOL	VSS	VDD	VO	RS	R/W	E	DB0	DB1
PIN NO.	9	10	11	12	13	14	15	16
SYMBOL	DB2	DB3	DB4	DB5	DB6	DB7	A	K

## NOTE

- 1.Lcd Display Type: VA/BLACK
- 2.Polarzier Mode: Transmissive, Negative
- 3.Viewing Direction: 6:00
- 4.Drive Method: 1/5Bias, 1/16Duty
- 5.Logic Supply Voltage: 5.0V
- 6.LCD Driving Voltage: 4.8V
- 7.Operating Temp:-20 TO 70°C
- 8.Storage Temp: -30 TO 80°C
- 9.Control IC: UC17066-01(E/J FONT, COB)
- 10.Backlight: White(2\*Led), ILed=30Ma, Vled=3.3V
- 11.Connector:
- 12.Ulteriorly Tolerance:±0.2MM



EV.T Shenzhen Eagle Vision Display Technology Co., Ltd

### 深圳市隼目显示技术有限公司

LCM TYPE

20\*2 CHARACTERS

Material No.

Dwg: CUSTOMER

Check: MODULE LMC20203VWWM-01C

SCALE: 1:1.5

Visual Angle



SHEET 1 OF 1