




# Outline Drawing

客户确认签名  
Customer approved

日期  
Date




VER	REVISION RECORD	Date	Name
A	NEW RELEASE	2017/06/22	LT
B			
C			

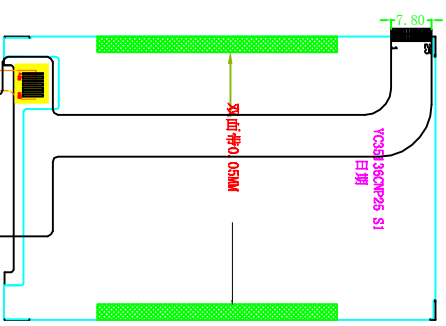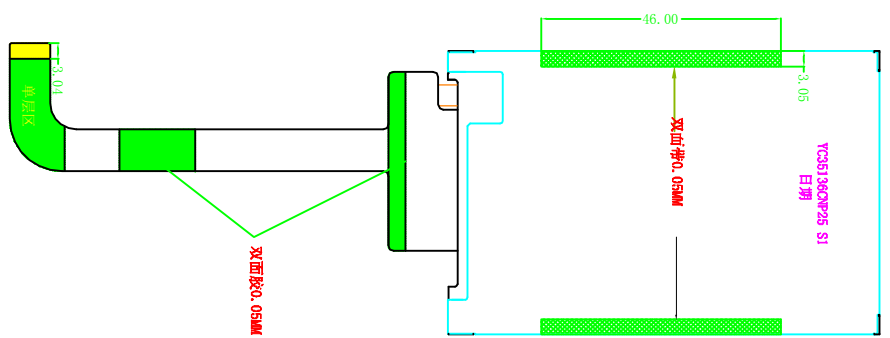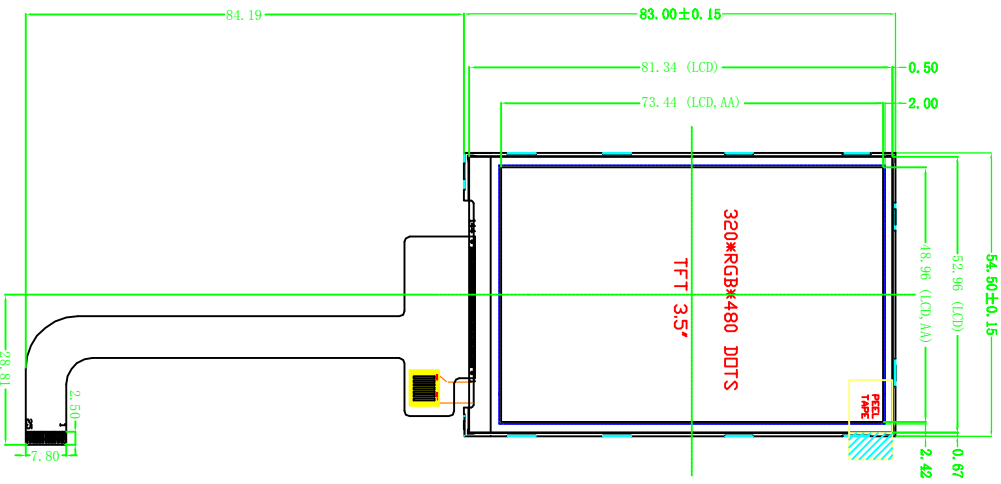

Pin	Pin Define
1	LEDA
2	LEDA
3	LEDK
4	LEDK
5	IOVCC
6	VDD
7	RESET
8	NC
9	LP/TE
10	GND
11	DPO
12	DNO
13	GND
14	CLKP
15	CLKN
16	GND
17	NC
18	NC
19	GND
20	NC
21	NC
22	GND
23	NC
24	NC
25	GND

- NOTE
- 1.Lcd Display Type: 3.5" TFT, 320\*480 TN, MIP1
  - 2.Polarizer Mode: Transmissive, normally black
  - 3.Viewing Direction: 12 O'CLOCK
  - 4.Logic Supply Voltage: VDD=2.8V IOVCC=1.8V
  - 5.Control IC: ST7796S MIP1 1 LANES
  - 6.Backlight: White(6\*1 Led), Iled=90mA, Vled=3.2V
  - 7.Backlight brightness and uniformity: 2600cd/m2, >85%
  - 8.Operating Temp: -20 TO 70
  - 9.Storage Temp: -30 TO 80°C
  - 10.Connector: FPC
  - 11.Ulteriorly Tolerance: ±0.2MM



深圳市集目显示技术有限公司  
Shenzhen Eagle Vision Display Technology Co., Ltd

LCM TYPE  
3.5" TFT  
Material No.

Dwg:	CUSTOMER		
Check:	MODULE	EVT035CTW25MP01	SCALE: 1:1
Dim:	MM	Visual Angle	SHEET 1 OF 1