


Outline Drawing

客户确认签名
Customer approved

日期
Date



VER	REV/STN	RECORD	Date	Name
A	NEW	RELEASE	2020/12/16	Zhou
B				
C				

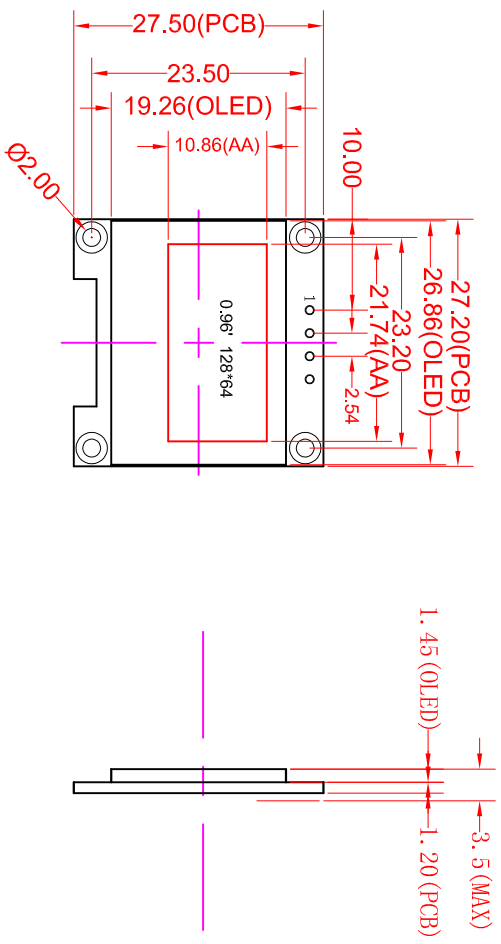

PINS DESCRIPTION (接口定义)

PIN SYMBOL	FUNCTION
1 GND	GROUND (逻辑地)
2 VCC	POWER SUPPLY PIN (逻辑电源正: 3.3V/5.0V)
3 SCLK	SERIAL CLOCK (串口时钟信号)
4 SDA	SERIAL DATA (串口数据信号)

EVD096EM41W01
EV---Company Code
D---OLED
096---Panel size 0.96 inch
E---Serial No. A-Z
M---Module: P--Panel
4---Interface pin
I---IIC
W---Display color: White/Yellow/Blue
01---Ver. No.

NOTE

1. Display Type: 0.96" PM-OLED, 128x64
2. Viewing Direction: ALL
3. Logic Supply Voltage: 3.0V(SSD1306), VCC=3.3V OR 5.0V
4. OLED Panel driving voltage: 12.0V
5. Control IC: SSD1306
6. Display color: White
7. Operating Temp: -40 TO 80
8. Storage Temp: -40 TO 85°C
9. Uteriorly Tolerance: ±0.2MM



深圳市隼目显示技术有限公司
Shenzhen Eagle Vision Display Technology Co., Ltd

LCM TYPE
0.96" (H) OLED
Material No.

Dwg:	CUSTOMER		
Check:	MODULE	EVD096EM41W01	SCALE: 1:1
Dim: MM	Visual Angle		SHEET 1 OF 1