



# Outline Drawing

客户确认签名  
Customer approved

日期  
Date




VER	REVISTION	RECORD	Date	Name
A	NEW	RELEASE	2019/07/15	zhang
B				
C				

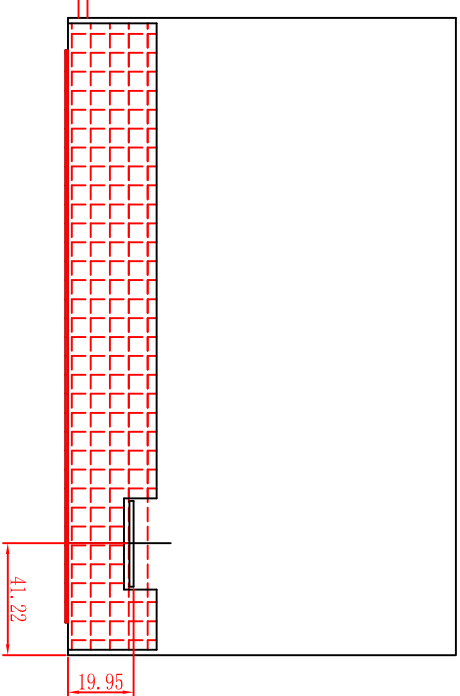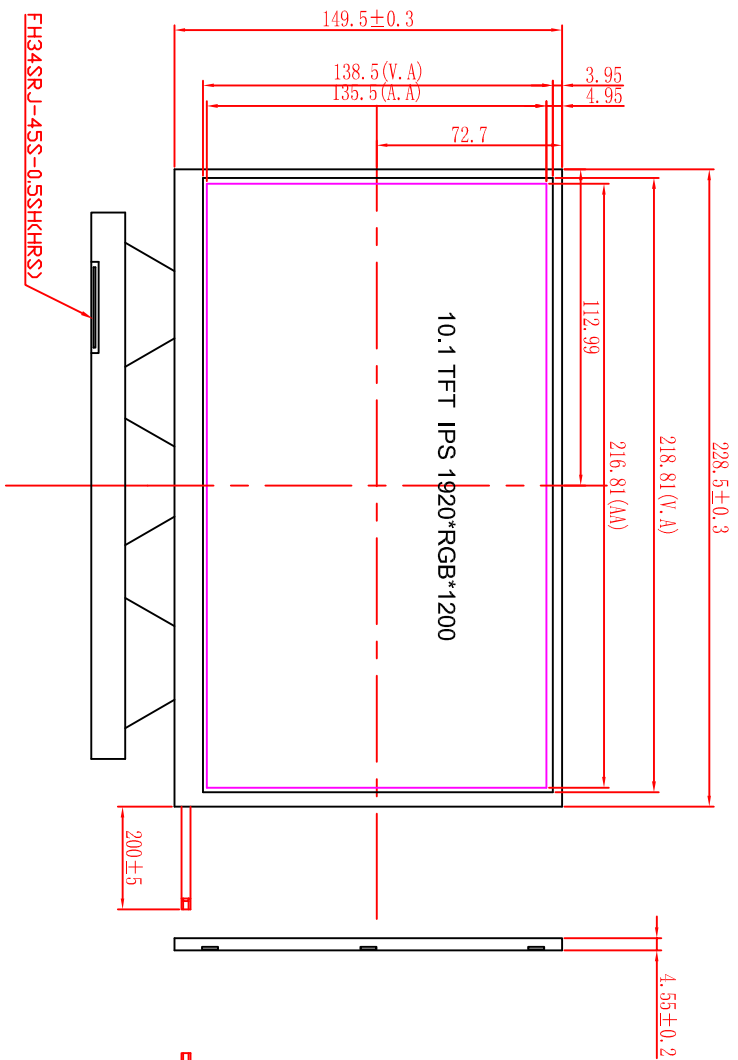

Pin	NAME
1	VDD
2	VDD
3	VDD
4	VDD
5	VDD
6	VDD
7	VDD_0TP=8.6V
8	12C_SCL
9	12C_SDA
10	GND
11	OLV0-
12	OLV0+
13	GND
14	OLV1-
15	OLV1+
16	GND
17	OLVCLK-
18	OLVCLK+
19	GND
20	OLV2-
21	OLV2+
22	GND
23	OLV3-
24	OLV3+
25	GND
26	ELV0-
27	ELV0+
28	GND
29	ELV1-
30	ELV1+
31	GND
32	ELVCLK-
33	ELVCLK+
34	GND
35	ELV2-
36	ELV2+
37	GND
38	ELV1-
39	ELV1+
40	GND
41	NC
42	VLED+
43	VLED+
44	VLED-
45	VLED-

Vled=21.6-26.4(max), Iled=225mA(TYP.)



- NOTE
- 1.Lcd Display Type: 10.1 TFT,1920\*1200,IPS,LVDS
  - 2.Polarizer Mode:Transmissive, normally black
  - 3.Viewing Direction: ALL
  - 4.Logic Supply Voltage: 3.3V
  - 5.Control IC:
  - 6.Backlight: White(8\*5 Led),Iled=225mA,Vled=24.0V
  - 7.Backlight brightness and uniformity: 1000cd/m2,>=75%
  - 8.Operating Temp: -10 TO 60
  - 9.Storage Temp: -20 TO 70°C
  - 10.Connector:
  - 11.Ultiority Tolerance:±0.2MM

深圳市集目显示技术有限公司  
Shenzhen Eagle Vision Display Technology Co., Ltd

LCM TYPE  
10.1吋 TFT  
Material No.

Dwg:	CUSTOMER	MODULE	EVT101HIN45L01	SCALE: 1:1
Check:		Visual Angle		SHEET 1 OF 1

Rim: WM 甲