




# Outline Drawing

客户确认签名  
Customer approved

日期  
Date



VER	REVISION RECORD	Date	Name
A	NEW RELEASE	2020/10/22	ZHAO
B			
C			

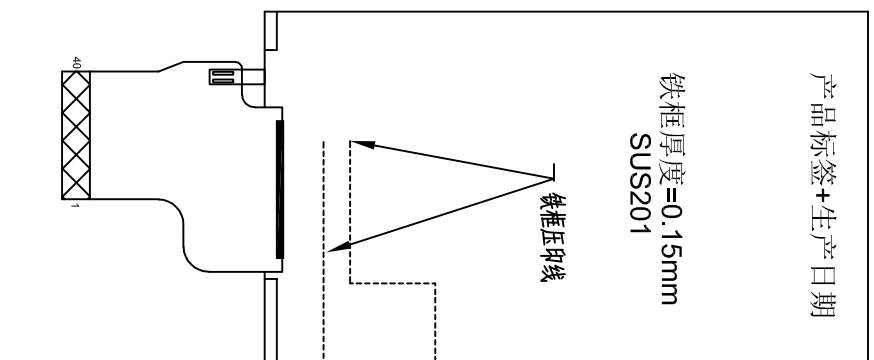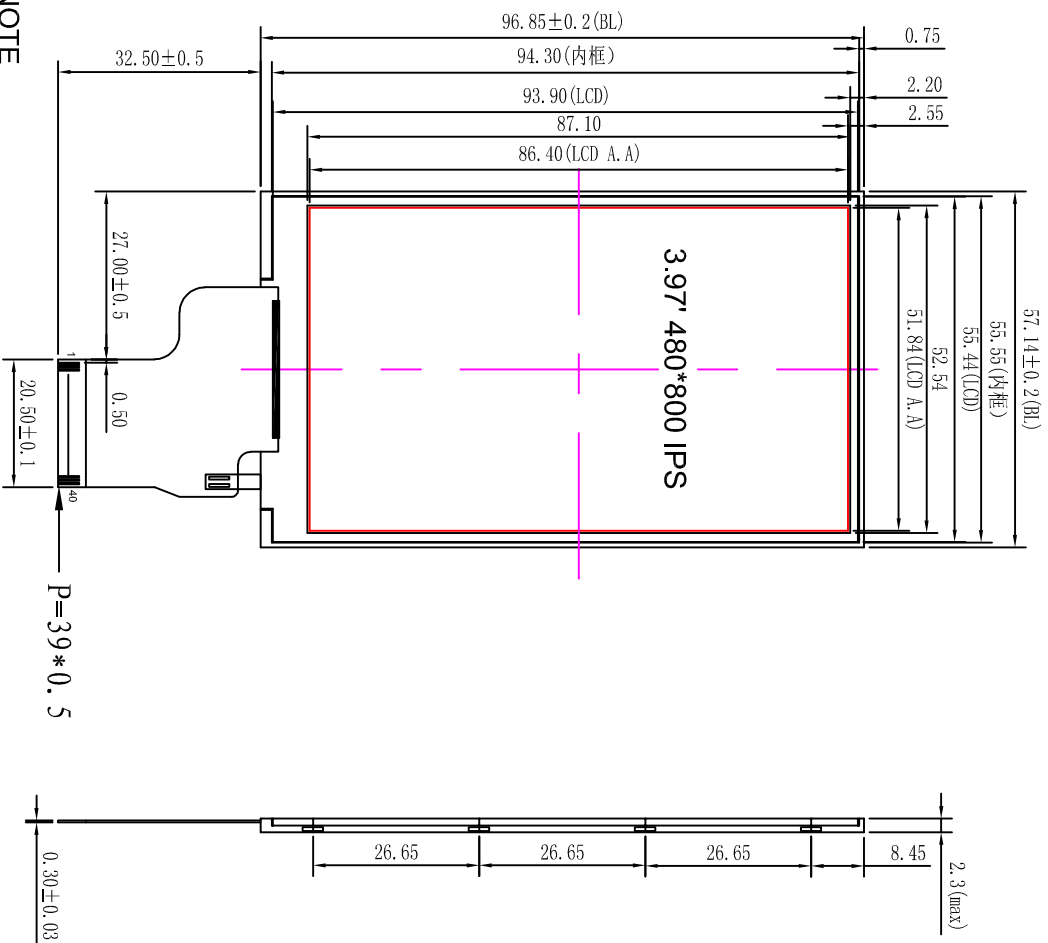

PIN	NAME
1	LEDA
2	LEDA
3	LEDK
4	LEDK
5	GND
6	VCC
7	GND
8	PCLK
9	HS
10	VS
11	DE
12	GND
13	GND
14	B0
15	B1
16	B2
17	B3
18	B4
19	B5
20	GND
21	GND
22	G0
23	G1
24	G2
25	G3
26	G4
27	G5
28	GND
29	GND
30	R0
31	R1
32	R2
33	R3
34	R4
35	R5
36	GND
37	RESET
38	SDI
39	SCL
40	CS

## NOTE

- 1.Lcd Display Type: 3.97" TFT, 480\*800
- 2.Polarizer Mode: Transmissive, normally white
- 3.Viewing Direction: ALL
- 4.Logic Supply Voltage: 3.0V
- 5.Control IC: ST7701S
- 6.Backlight: White(8\*1 Led), Iled=160mA, Vled=3.2V
- 7.Backlight brightness and uniformity: 250cd/m2, >=80%
- 8.Operating Temp: -20 TO 70
- 9.Storage Temp: -30 TO 80 °C
- 10.Connector: FPC
- 11.Ulteriorly Tolerance: ±0.2MM

深圳市隼目显示技术有限公司  
Shenzhen Eagle Vision Display Technology Co., Ltd

LCM TYPE  
4 1/2 TFT  
Material No.

Dwg:	CUSTOMER		
Check:	MODULE	EVT040A1W40R01	SCALE: 1:1
1/1	Visual Angle		SHEET 1 OF 1