


# Outline Drawing

客户确认签名  
Customer approved


日期  
Date




VER	REVISION RECORD	Date	Name
A	NEW RELEASE	2015/06/03	LT
B			
C			

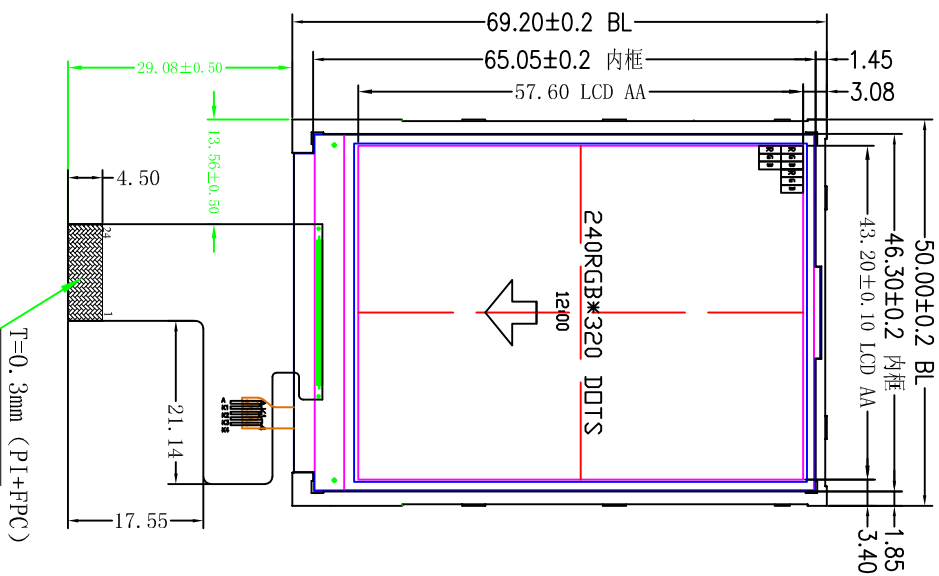

-2.30±0.15  
不包含海棉及FPC厚度

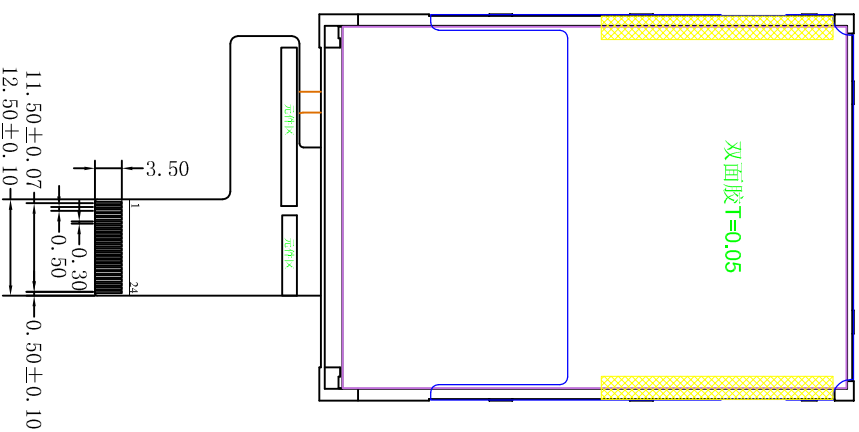

1	VCC
2	GND
3	LEDA
4	RESET
5	CS
6	RS
7	WR
8	RD
9	DB0
10	DB1
11	DB2
12	DB3
13	DB4
14	DB5
15	DB6
16	DB7
17	DB8
18	DB9
19	DB10
20	DB11
21	DB12
22	DB13
23	DB14
24	DB15



## NOTE

1. Lcd Display Type: 2.83'TFT+CTP, 320\*240, TN
2. Polarzier Mode: Transmissive, normally white
3. Viewing Direction: 120'clock
4. Logic Supply Voltage: 3.0V
5. Control IC: S17789V
6. Backlight: White(1\*4 Led), Iled=80mA, Vled=3.2V
7. Backlight brightness and uniformity: 250cd/m<sup>2</sup>, >=85%
8. Operating Temp: -10 TO 60°C
9. Storage Temp: -20 TO 70°C
10. Connector: FPC
11. Ulteriorly Tolerance: ±0.2MM



E.V.T

深圳市集目显示技术有限公司  
Shenzhen Eagle Vision Display Technology Co., Ltd

LCM TYPE

2.8吋TFT

Material No.

Dwg:

CUSTOMER

Check:

MODULE

EVT028A1TN24M01

SCALE: 1:1

Dim: MM

Visual Angle



SHEET 1 OF 1