



Outline Drawing

客户确认签名
Customer approved

日期
Date



VER	REVISION RECORD	Date	Name
A	NEW RELEASE	2020/05/15	King
B			
C			
D			

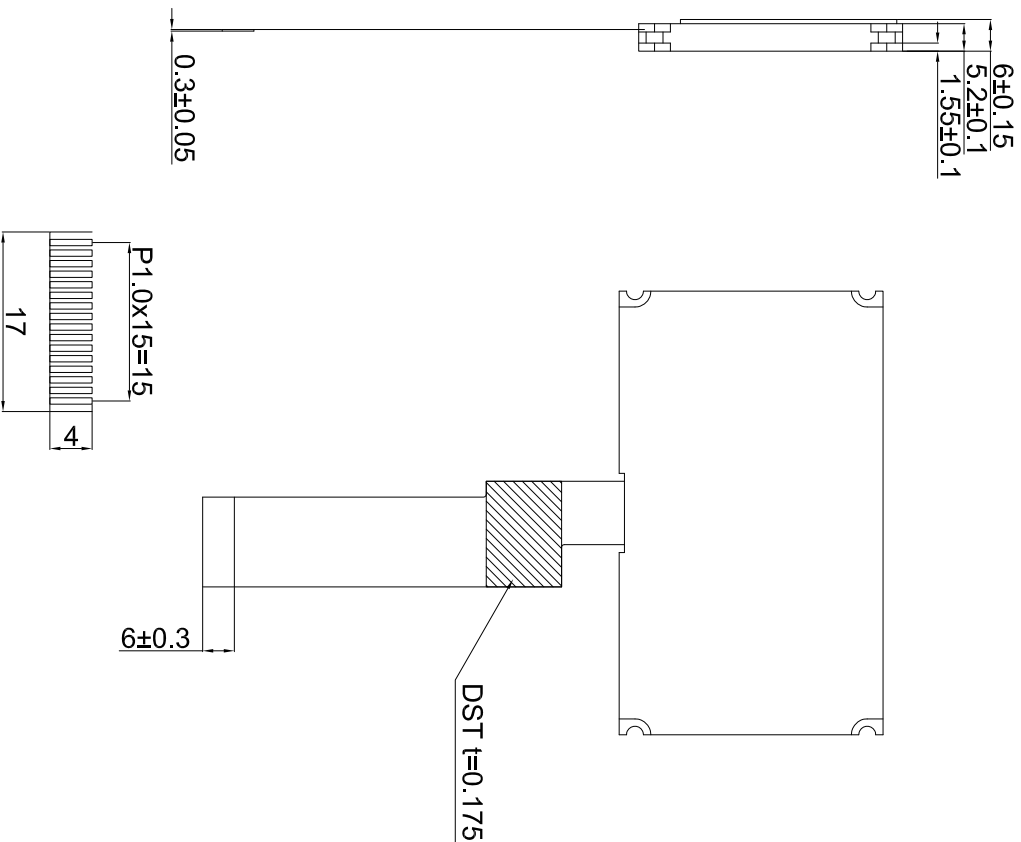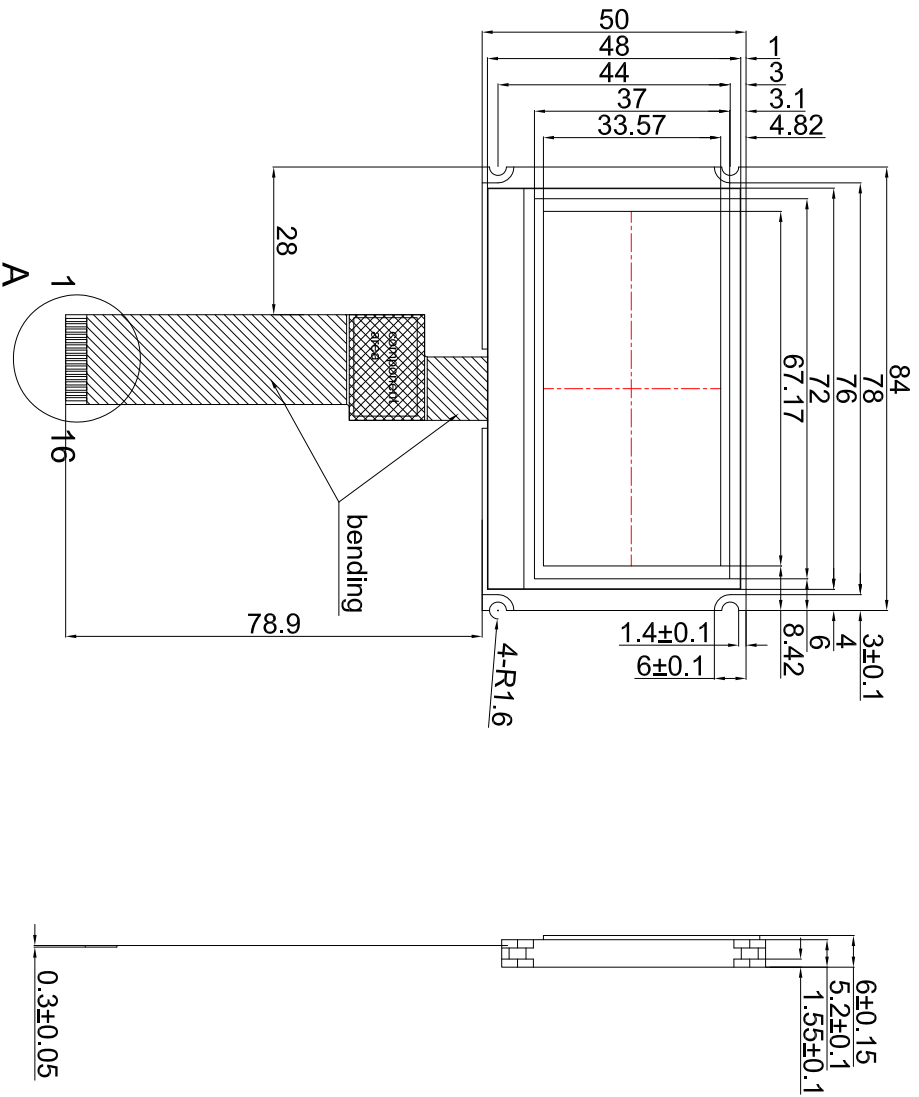

PIN NO.	SYMBOL	
1	VSS	
2	VDD	
3	DB7	
4	DB6	
5	DB5	
6	DB4	
7	DB3	
8	DB2	
9	DB1	
10	DB0	
11	RD	
12	WR	
13	D/C	
14	RST	
15	CS	
16	LED+	

NOTE

1. Lcd Display Type: FSTN, 240*160 dots
2. Polarizer Mode: Transflective, positive
3. Viewing Direction: 12 O'CLOCK
4. Logic Supply Voltage: 3.3V
5. Control IC: UC1628C(C06)
6. Drive Method: 1/14Bias, 1/160Duty, VOP=17.0V
7. Backlight: White, Vled=3.3V
8. Operating Temp: -20 TO 70°C
9. Storage Temp: -30 TO 80°C
10. LCD Connector: FPC
11. Ulteriorly Tolerance: ±0.2MM

detail A

深圳市集目显示技术有限公司

E.V.T Shenzhen Eagle Vision Display Technology Co., Ltd

Customer: CUSTOMER Material No. MONO LCM

Dwg: MODULE SCALP: 1:1

Check: Visual Angle SHEET 1 OF 1

Dim: MM