Outline Drawing

客户确认签名 Customer approved		日期 Date	

VER	REVISION RECORD	Date	Name
A	NEW RELEASE	2007/11/03	YOYO
B			
C			

RoHS

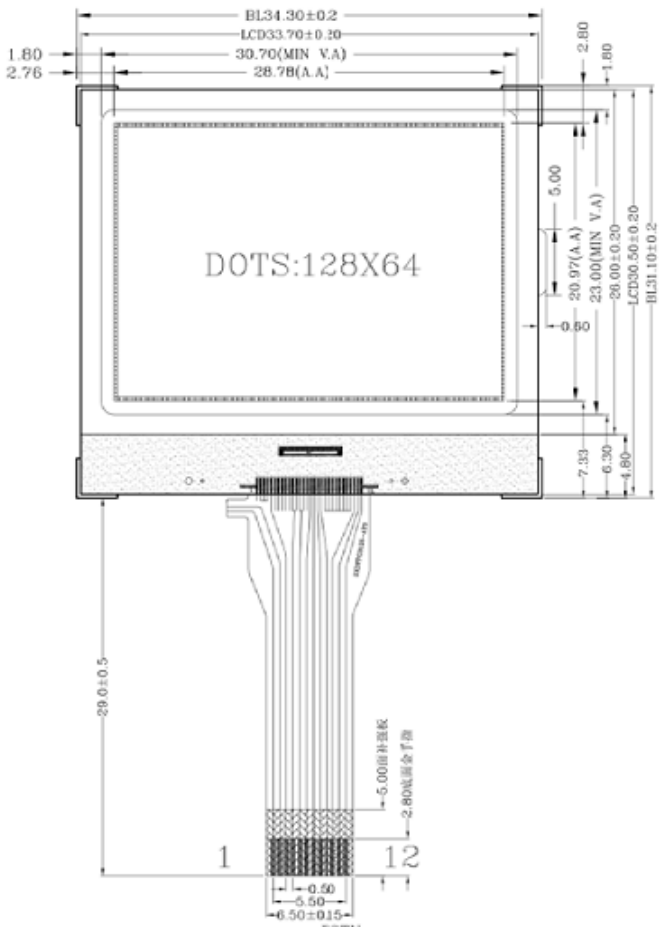

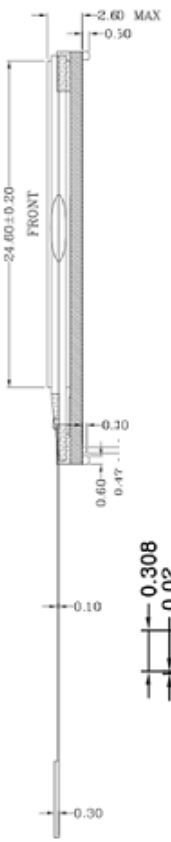



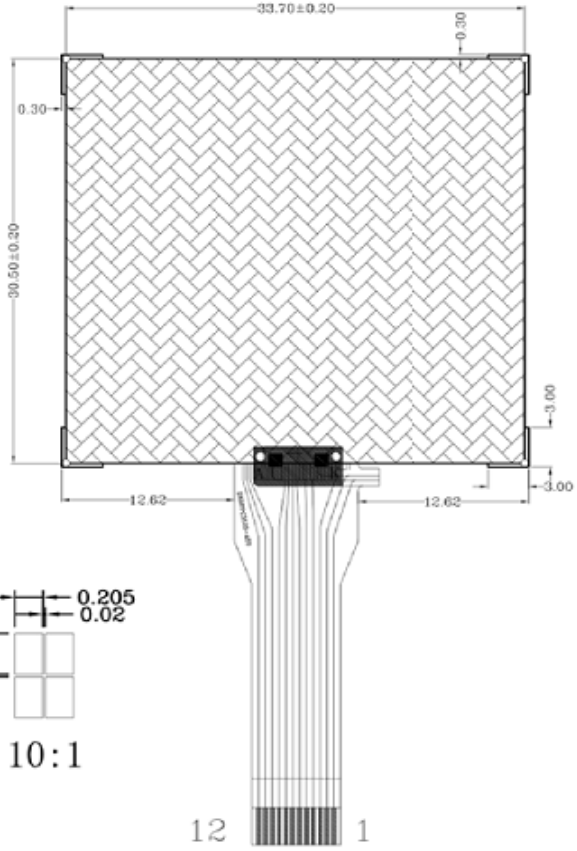

PIN	ASSIGN
1	LED K
2	LED A
3	VG
4	XVO
5	VO
6	VSS
7	VDD
8	SDA
9	SCL
10	AO
11	REST
12	CS

NOTE

1.Lcd Display Type: DFSTN
2.Polarzier Mode:Transmissive,negative
3.Viewing Direction: 12:00
4.Drive Method:1/9Bias,1/65Duty
5.Logic Supply Voltage: 3.3V
6.LCD Driving Voltage: 9.0V
7.Operating Temp: 0 TO 50℃
8.Storage Temp：-10 TO 60℃
9.Control IC: ST7567(COG)
10.Backlignt: White(1*Led),ILed=15mA,Vled=3.0V
11.Connector: fpc
12.Ulteriorly Tolerance:±0.2MM

E.V.T 深圳市隼目显示技术科技有限公司 Shenzhen Eagle Vision Display Technology Co., Ltd				LCM TYPE 128*64 DOTS
Dwg:		CUSTOMER		Material No.
Check:		MODULE	LMG12864015DNWM-A	SCALE: 1:1
Dim: MM		Visual Angle		SHEET 1 OF 1

由 Autodesk 教育版产品制作